

FB 3160 Beschermbuis met flens volgens DIN43772 model 2F of 3F

Beschermbuis met flens

Ontwerp 2F of 3F volgens DIN 43772

Procesaansluiting Gelaste flens

Materiaal RVS 316 - (Wst 1.4401)

Instrument connection

Vrijdraaiende moer M24x1.5mm standaard

Gelaste moer Optioneel: Moer 1/2" NPT of 1/2" BSP

Stem

Insteek lengte "U" Te specificeren

DIN43772 Form 2F Recht over volle lengte

DIN43772 Form 3F Tip verjonging via swaging. 50 mm tip dia. 9.0 mm

Binnen diameter Geschikt voor 6.0mm or 8.0mm sensoren

Flens

Size / Rating / Facing Te specificeren


Verlenging "X" 2F = 80mm, 3F = 82mm

Opties

Andere materialen: Monel400, Hasteloy C276 of C4, Titanium Gr.II

Andere afmetingen

Tantalium bescherm huls

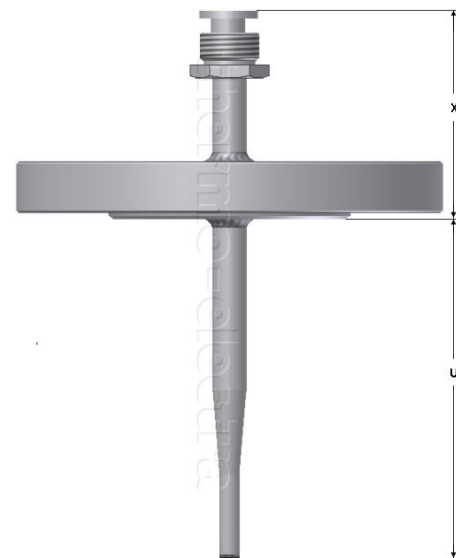

Tube size	Sensor	Form
9 x 1 mm	6.0mm	2F or 3F
11 x 2 mm	6.0mm	2F or 3F
12 x 2.5 mm	6.0mm	2F or 3F
14 x 2.5 mm	8.0mm	2F or 3F
15 x 3 mm	8.0mm	2F or 3F

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model	FB 3160					
Lengte "U" in mm						
Length "X" in mm						
Form 2F or 3F						
Tube size						
Flange size / rating / facing						

H3-1 Rev. 07/07