

TE1600 PCB printmontage thermokoppel contrastekker

Toepassing

Connector	Thermokoppel en Pt100 circuits
Ontwerp	Door middel van soldering te bevestigen op printplaten
Materialen	Glas gevuld thermoplastische lichaam met originele thermokoppel inhoudelijke contacten
Soldering contacts	Koperen soldeer contacten om te bevestigen op printplaten

Temperatuurbereik

Temperatuurgrens	Maximaal 200°C
------------------	----------------


Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Robuust ontwerp
Gegoten isolatieschotten	Voorkomen kortsluiting

Versions

Available versions	Vlakke montage (F)Achterzijde montage (R)Vierkante montage (S)
--------------------	--

Kleurcode

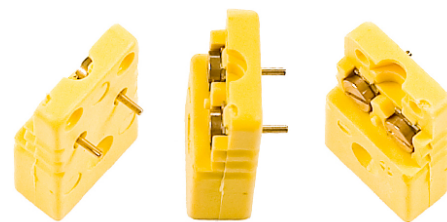


Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

** For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors*

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

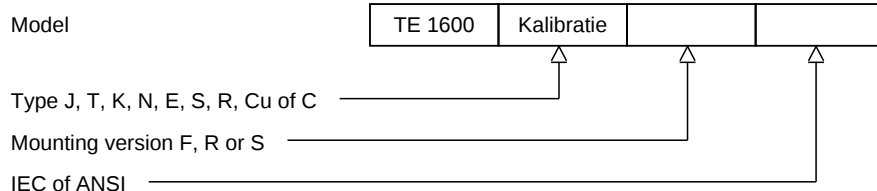

H9-1 Rev.0 7/07