

TE1037 Thermokoppel strippaneel met aluminium frame

Toepassing

Meervoudig female panel Contacten	Thermokoppel en Pt100 circuits
Front	Veerbelaste thermokoppel contacten
Materialen	Geanodiseerd aluminium voor volledige corrosie bescherming
	Glass filled thermocouple body with original thermocouple material contacts

Temperatuurbereik

Temperatuurgrens	Maximaal 200 °C
-------------------------	-----------------

Constructie

Body	Glasgevuld thermoplastisch materiaal
Ontwerp	Roestvrijstalen beugel met 2 schroeven
Gegoten isolatieschotten	Voorkomen kortsluiting
Codering	Color coded thermocouple front

Draad afmeting

Accepteert draden	Van 0,2 mm tot 2,0 mm
--------------------------	-----------------------

Kleurcode




Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

* For Pt. 6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

Ordering code

*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

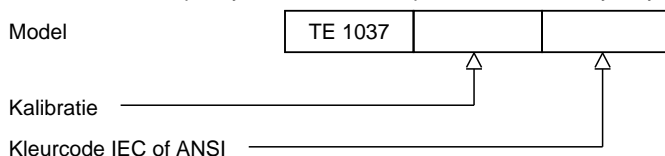

H9-2 Rev. 0 07/07