


# TE1010C Standaard jack keramisch tot 650°C

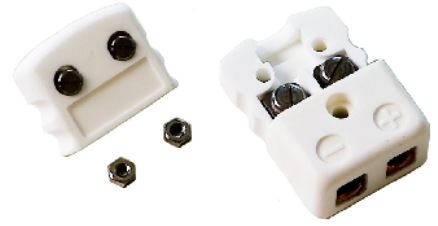

## Toepassing

<b>Connector</b>	Thermokoppel en Pt100 circuits
<b>Contacten</b>	Zorgen voor een goed contact, zelfs in veeleisende toepassingen
<b>Materialen</b>	Ceramic with original thermocouple material contacts

## Temperatuurbereik

<b>Temperatuurgrens</b>	Maximum 650Å°C.
-------------------------	-----------------

## Constructie

<b>Body</b>	High purity alumina body material
<b>Ontwerp</b>	Cover with crews for quick wiring
<b>Gegoten isolatieschotten</b>	Voorkomen kortsluiting

## Draad afmeting

<b>Accepteert draden</b>	van 0,2 mm. tot 2,0 mm.
<b>Kabel diameter</b>	Maximum 8,0 mm.

## Kleurcode

<b>Beschikbare kleuren</b>	White only, thermocouple calibration by color dot
----------------------------	---

Thermocouple type	T/C Type Code	ANSI Color Code	IEC Color Code
Iron Constantan	J	Black	Black
Copper Constantan	T	Blue	Brown
Chromel Alumel (NiCr-Ni)	K	Yellow	Green
Nicrosil Nisil	N	Orange	Pink
Chromel Constantan	E	Violet	Violet
Platinum 10% Rhodium	S	Green	Orange
Platinum 13% Rhodium	R	Green	Orange
Uncompensated *	Cu	White	White
Tungsten Rhenium	C	Brown	-

\* For Pt.6%Rh. / Pt.30%Rh. B type thermocouple and Pt100 sensors

## Ordering code

\*This datasheet is purely indicative, build-up of model code may vary from this datasheet.

Model TE 1010C